










00158-SSWH/00158-SSWHR/00158-SSWH1/00158-SSWHO

Material	Housing:Made of SUS304
Housing Colour	polished S.S
LED Colour	<input checked="" type="checkbox"/> Daylight White <input type="checkbox"/> Warm White <input type="checkbox"/> Red <input type="checkbox"/> Yellow <input type="checkbox"/> Blue <input type="checkbox"/> RGB
LED	3pcs
LED Beam Angle	120°
Colour Temperature	<input type="checkbox"/> Warm White: K <input checked="" type="checkbox"/> Daylight White: 5500-6300 K
Working Voltage	DC12-24V
Wattage	0.5 W
Effective Lumen	45Lumen
water-proofing and dust-proofing	IP: 66
life TEST FOR LED LAMP(1000 hours)	Lumen Maintenance Percentage>98%
Operation Temperature	-20° ~ +45℃
Certificate	     

The light is for type "Z" attachments. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shell be destroyed

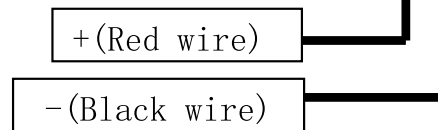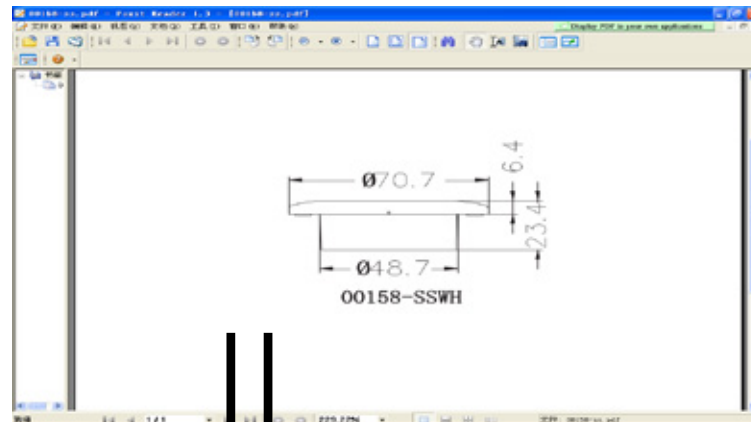

LIFETIME FOR LUMEN MAINTENANCE

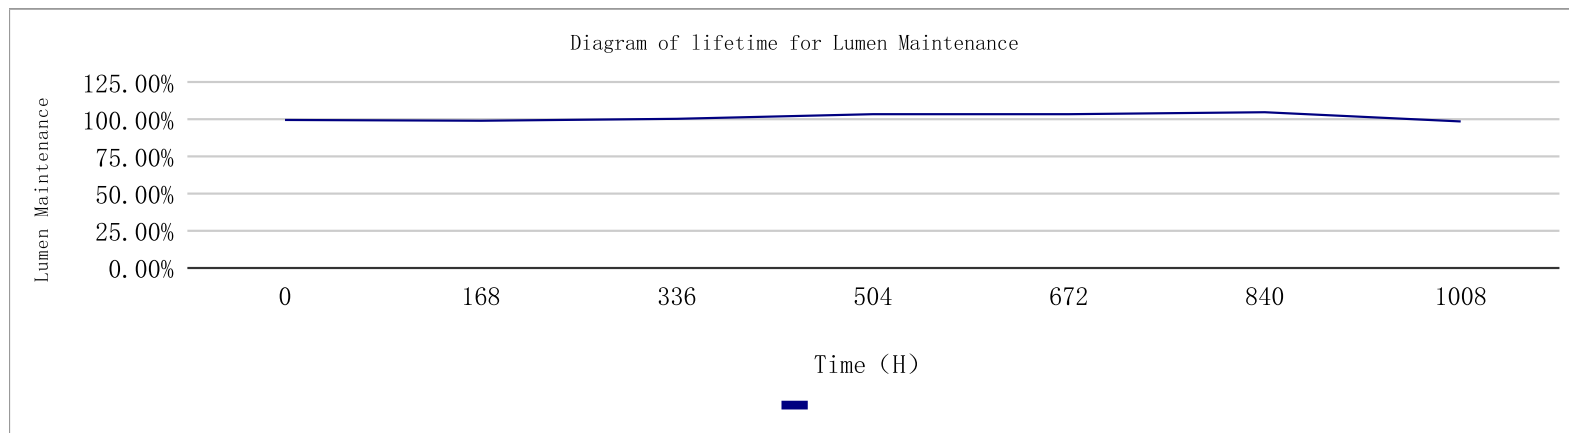

Testing Module: Lasting 1000 hrs, Temperature Range 36-40°C, Humidity: 60%RH, Input Voltage: DC12V