



<b>00124-LD</b>	
<b>Material</b>	<b>Housing: Made of PC</b>
<b>Housing Colour</b>	<b>Black</b>
<b>LED Colour</b>	<input checked="" type="checkbox"/> Nature White <input type="checkbox"/> Warm White <input type="checkbox"/> Red
<b>LED</b>	<b>33pcs*2</b>
<b>Colour Temperature</b>	Nature White: 4000-4500 K
<b>Features</b>	<b>Surface mount</b>
<b>Working Voltage</b>	<b>DC10-24V</b>
<b>Wattage</b>	<b>2.5 W/2.5 W</b>
<b>Effective Lumen</b>	<b>60Lumen/140Lumen</b>
<b>water-proofing and dust-proofing</b>	<b>IP: 65</b>
<b>life TEST FOR LED LAMP(1000 hours)</b>	<b>Lumen Maintenance Percentage&gt;90%</b>
<b>Operation Temperature</b>	-20° ~ +45°C
<b>Certificate</b>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px;">U L</div> <div style="border: 1px solid black; padding: 2px;">C E</div> <div style="border: 1px solid black; padding: 2px;">RoH S</div> <div style="border: 1px solid black; padding: 2px;">TUV</div> </div> <div style="display: flex; justify-content: center; margin-top: 5px;"> <span style="color: blue; font-size: 20px;">■</span> <span style="color: blue; font-size: 20px;">■</span> </div>
<p>The light is for type "Z" attachments. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shell be destroyed</p>	

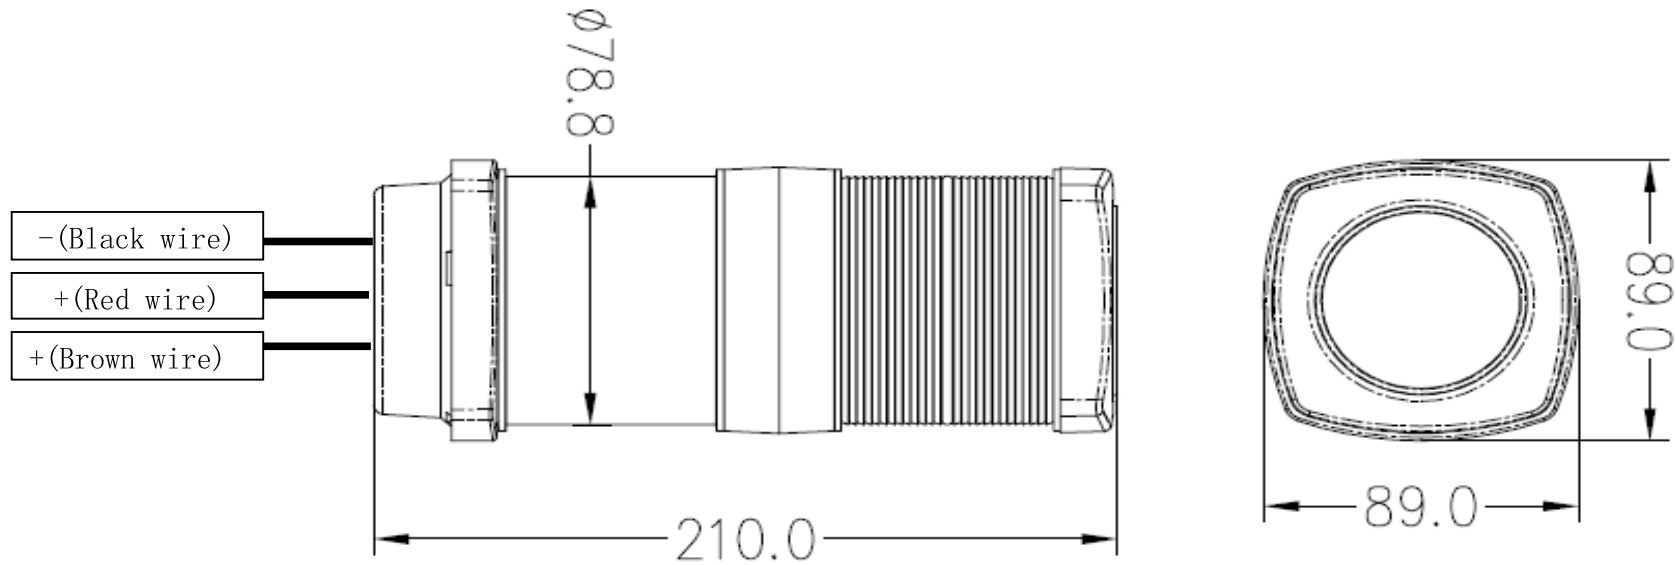

### LIFETIME FOR LUMEN MAINTENANCE

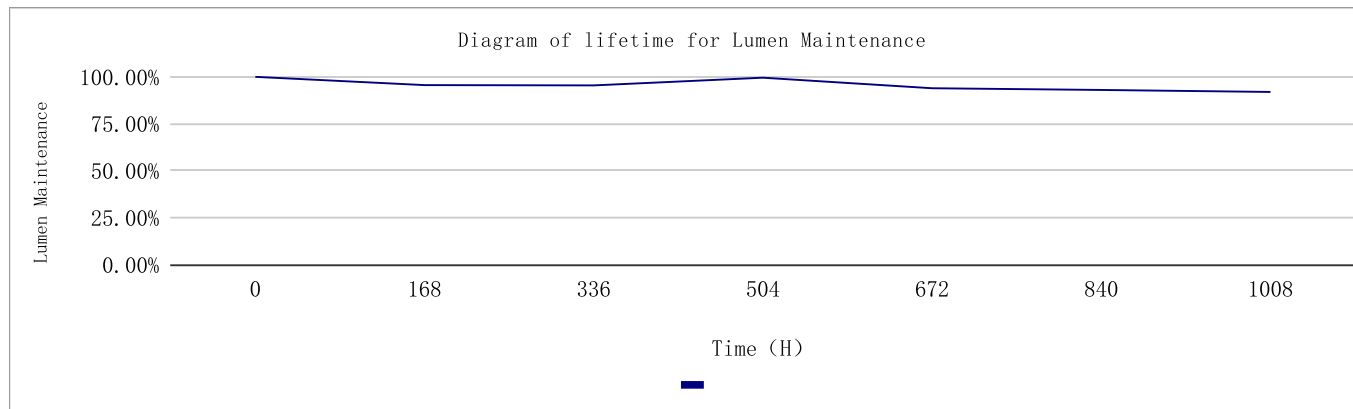

Testing Module: Lasting 1000 hrs, Temperature: Range 36-40°C, Humidity: 60%RH, Input Voltage: DC12V