





00701-WH/00701-WR/00701-WHO/00701-WHOY/00701-WRO	
Material	Housing:Made of SUS304
Housing Colour	polished S.S
LED Colour	<input type="checkbox"/> Daylight White <input checked="" type="checkbox"/> Warm White <input checked="" type="checkbox"/> Red
LED	WH:5PCS white LED WR:5PCS white LED+4PCS red LED
LED Beam Angle	120°
Colour Temperature	<input checked="" type="checkbox"/> Warm White:2900-3200K <input type="checkbox"/> Daylight: K
Features	Surface mount
Working Voltage	DC12V
Wattage	WH:2W(White) WR:2W(White)+0.6W(Red)
Effective Lumen/Power compared to standard bulb	WH:84Lumen/15W WR:84Lumen(White)/15W+2Lumen(Red)/2W
water-proofing and dust-proofing	IP: 65
life TEST FOR LED LAMP(1000 hours)	Lumen Maintenance Percentage>92%
Operation Temperature	-20° ~ +45°C
Certificate	
<p>The light is for type"Z" attachments.The external flexible cable or cord of this luminaire cannot be replaced;if the cord is damaged, the luminaire shell be destroyed</p>	

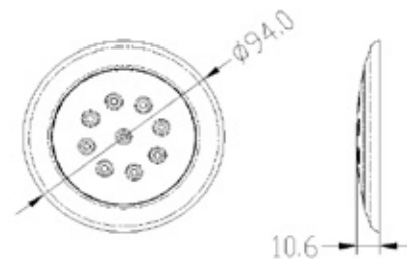

00701-WH

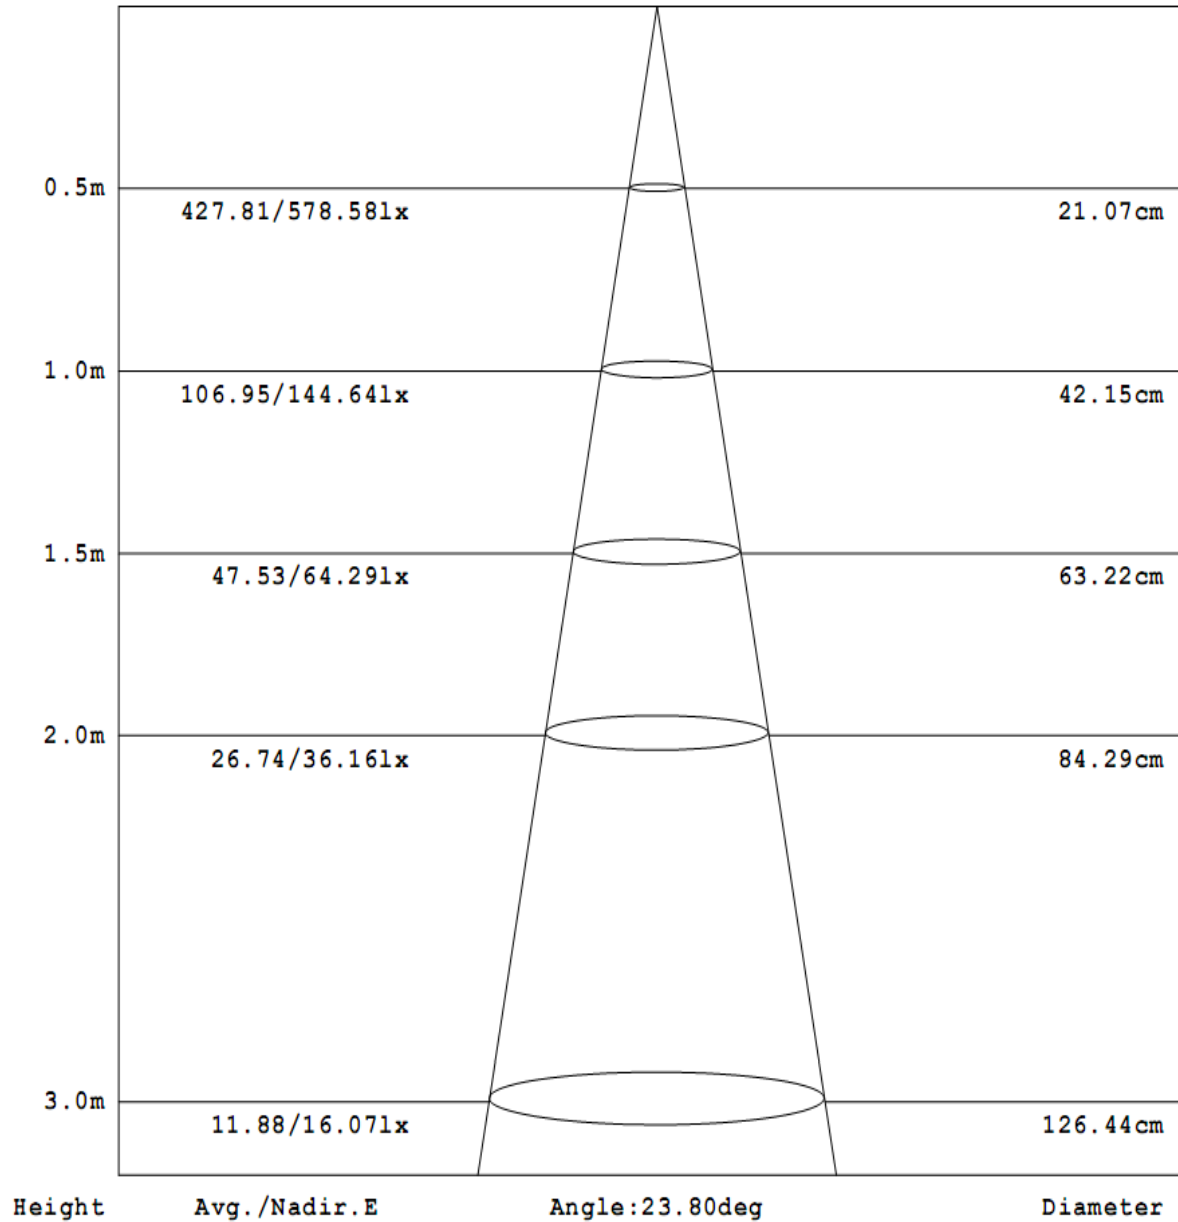

LIFETIME FOR LUMEN MAINTENANCE

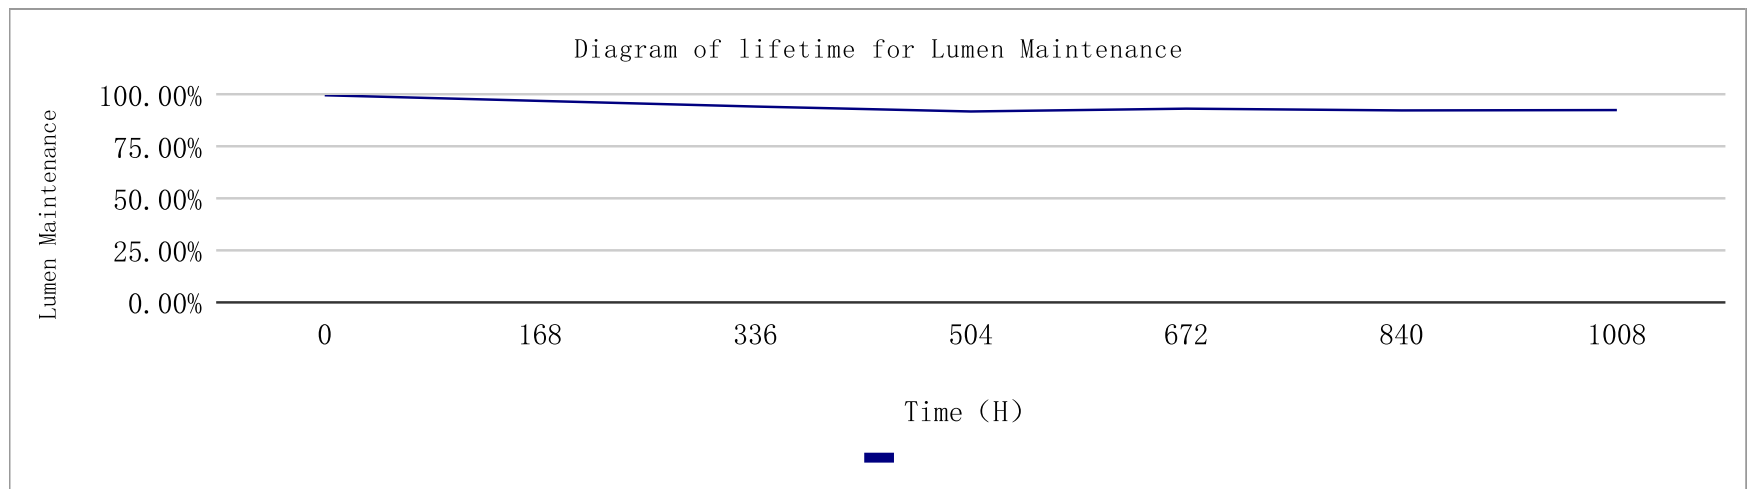

Testing Module: Lasting 1000 hrs, Temperature Range 36–40°C, Humidity: 60%RH, Input Voltage: DC12V