




<b>00702-WH/00702-WH0/00702-WH0Y</b>	
<b>Material</b>	<b>Housing:Made of SUS304</b>
<b>Housing Colour</b>	polished S.S
<b>LED Colour</b>	<input type="checkbox"/> Daylight White <input checked="" type="checkbox"/> Warm White <input type="checkbox"/> Red
<b>LED</b>	<b>9 PCS</b>
<b>LED Beam Angle</b>	<b>120°</b>
<b>Colour Temperature</b>	<input checked="" type="checkbox"/> Warm White:2900-3200K <input type="checkbox"/> Daylight: K
<b>Features</b>	<b>Surface mount</b>
<b>Working Voltage</b>	DC12V
<b>Wattage</b>	<b>3.2 W</b>
<b>Effective Lumen/Power compared to standard bulb</b>	<b>162 Lumen/30W</b>
<b>water-proofing and dust-proofing</b>	<b>IP: 65</b>
<b>life TEST FOR LED LAMP(1000 hours)</b>	<b>Lumen Maintenance Percentage&gt;92%</b>
<b>Operation Temperature</b>	-20° ~ +45°C
<b>Certificate</b>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px;">U L</div> <div style="border: 1px solid black; padding: 2px;">C E</div> <div style="border: 1px solid black; padding: 2px;">RoH S</div> <div style="border: 1px solid black; padding: 2px;">TUV</div> </div> <div style="display: flex; justify-content: center; margin-top: 5px;"> <span style="color: blue; font-size: 2em; margin-right: 10px;">■</span> <span style="color: blue; font-size: 2em;">■</span> </div>
<p>The light is for type "Z" attachments. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shell be destroyed</p>	

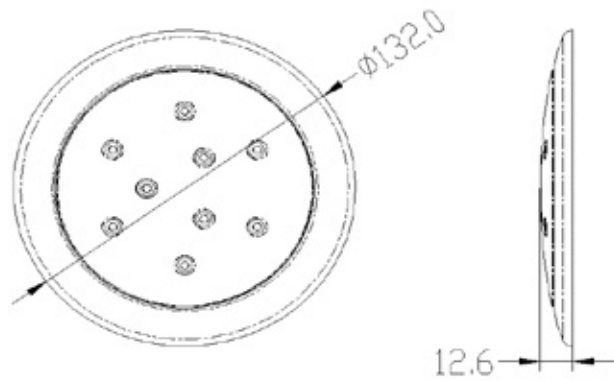

00702-WH

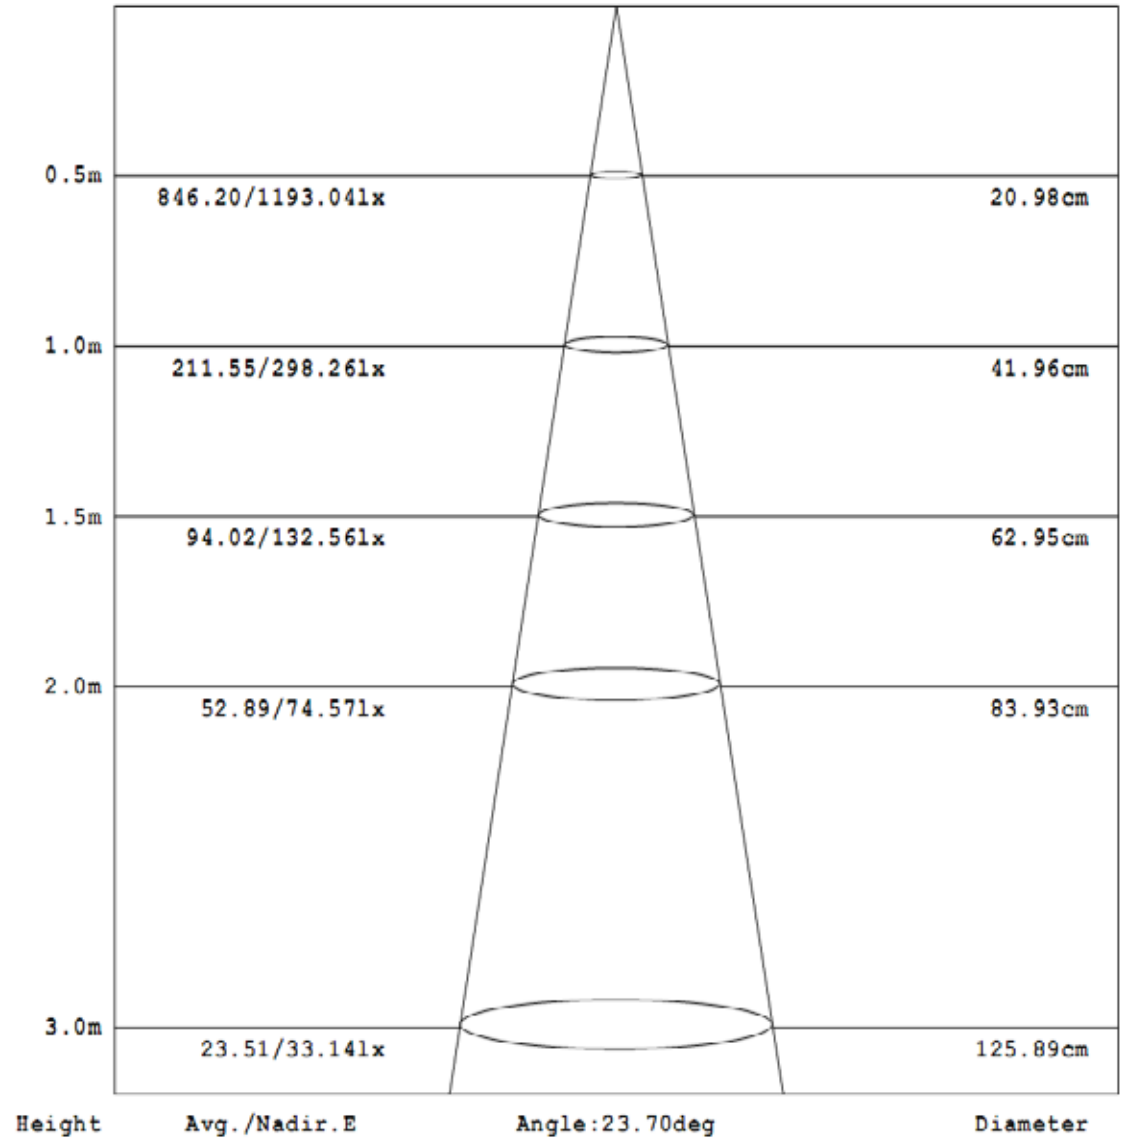

## LIFETIME FOR LUMEN MAINTENANCE

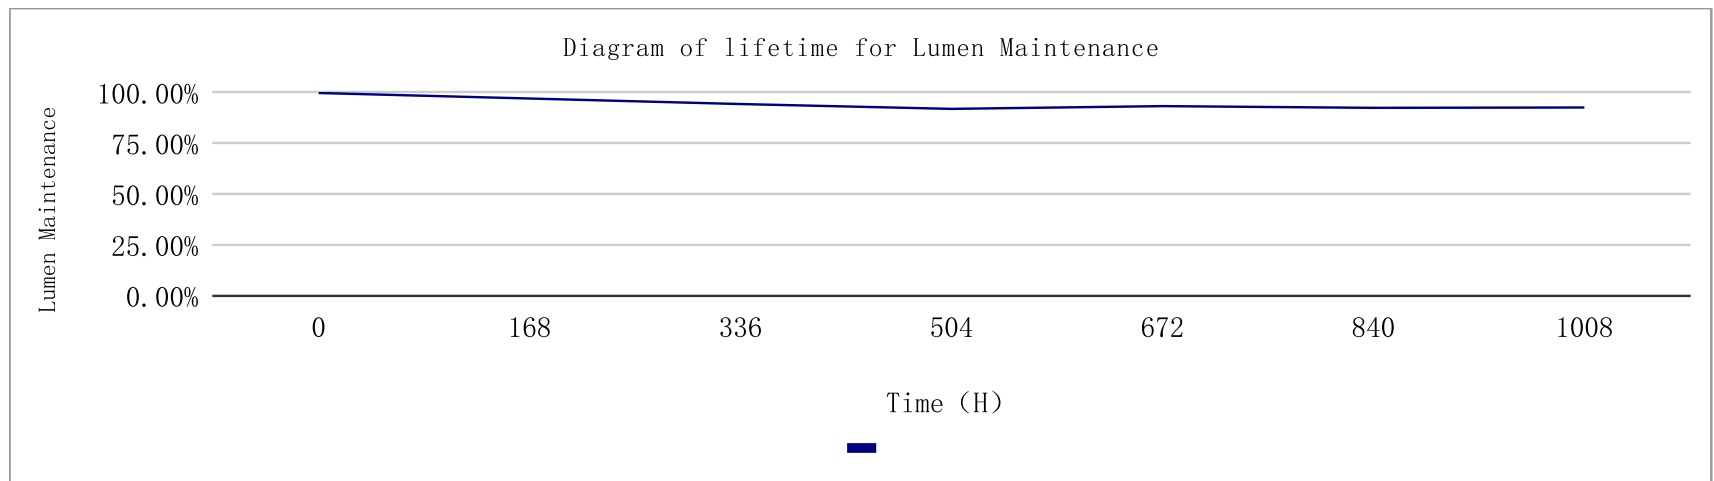

Testing Module: Lasting 1000 hrs, Temperature Range 36-40°C, Humidity: 60%RH, Input Voltage: DC12V