



01113-LD/01113-LLD/01114-LD/01114-LD29NB/01114-LDBA	
Material	Housing: Made of PA
Housing Colour	Black
LED Colour	<input type="checkbox"/> Warm White <input checked="" type="checkbox"/> Nature White <input type="checkbox"/> Red <input type="checkbox"/> Green
LED	16PCS
Colour Temperature	<input type="checkbox"/> Warm White: K <input checked="" type="checkbox"/> Nature White: 4500 K
Features	Surface mount/All-Round and Masthead Light
Working Voltage	DC12V
Wattage	2 W
Effective Lumen/Power compared to standard bulb	186Lumen/30W
water-proofing and dust-proofing	IP: 65
life TEST FOR LED LAMP(1000 hours)	Lumen Maintenance Percentage>90%
Operation Temperature	-20° ~ +45°C
Certificate	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px;">UL</div> <div style="border: 1px solid black; padding: 2px;">CE</div> <div style="border: 1px solid black; padding: 2px;">RoHS</div> <div style="border: 1px solid black; padding: 2px;">TUV</div> </div>

The light is for type "Z" attachments. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire will not be functional.

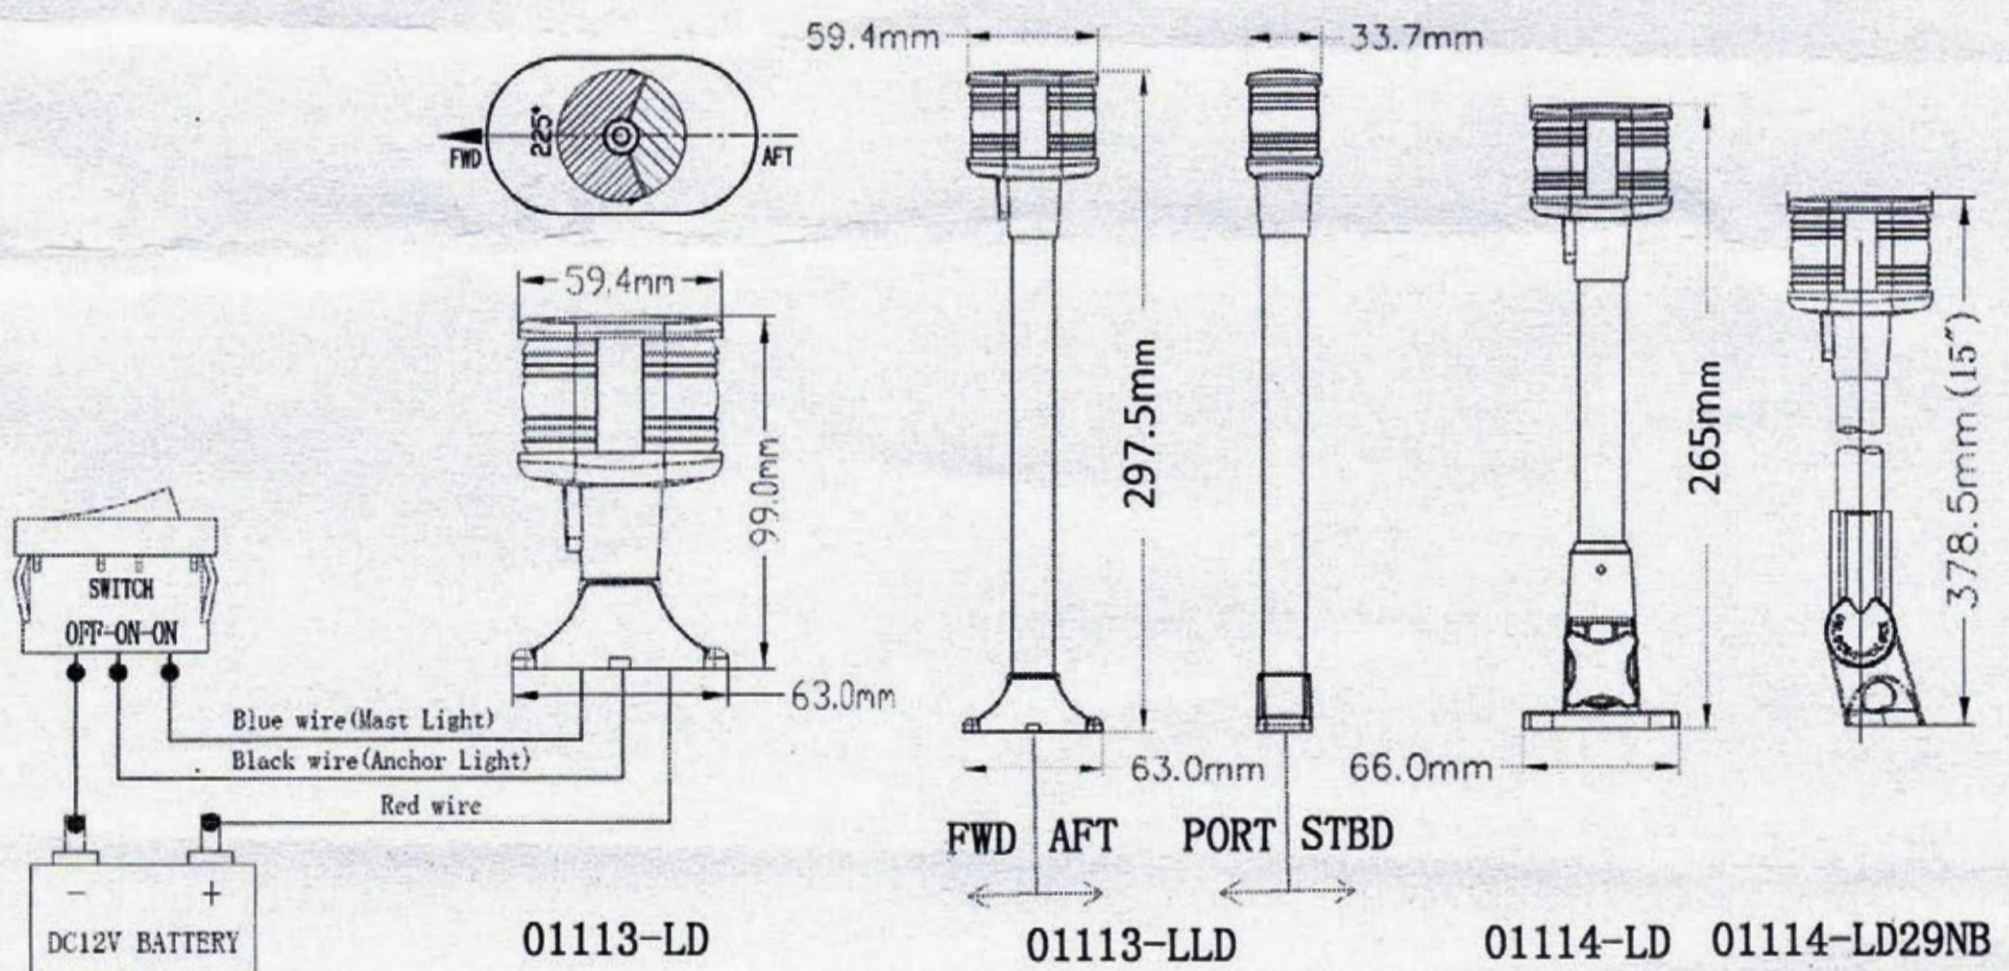

LIFETIME FOR LUMEN MAINTENANCE

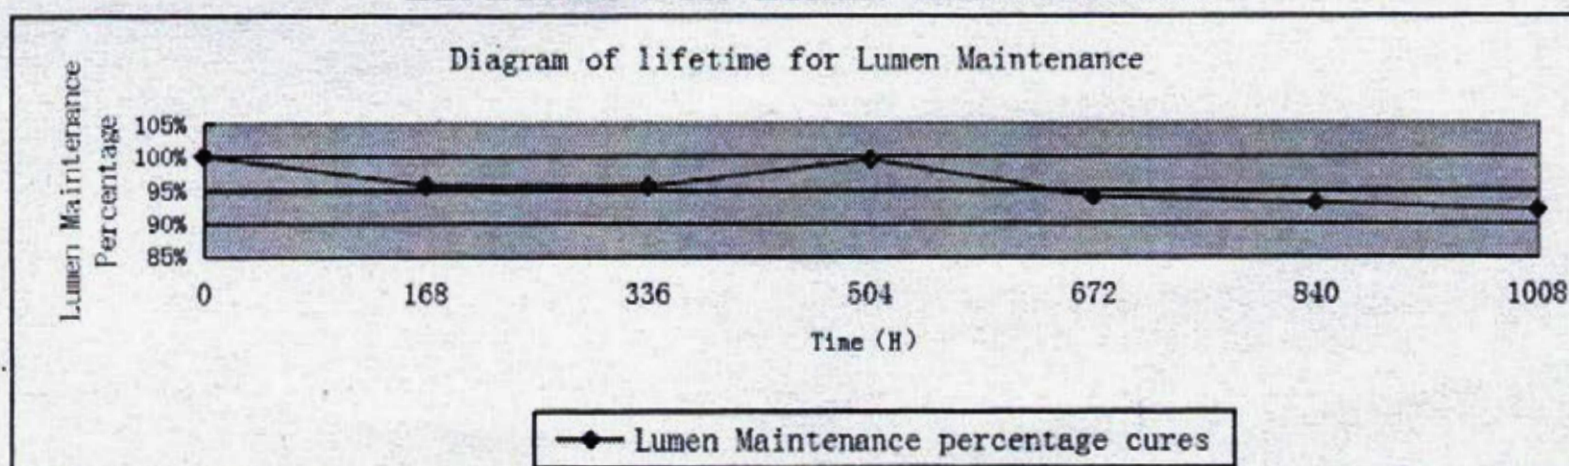

Testing Module: Lasting 1000 hrs, Temperature: Range 36-40°C, Humidity: 60%RH, Input Voltage: DC12V